

**PRODUCT
SPEC SHEET**

Showroom
collection:
Evolution 250 food
waste disposer

S H O W R O O M
C O L L E C T I O N



Special edition

Evolution 250 food waste disposer

This special edition version of our quietest and most powerful food waste disposer stands out from the crowd. It features black trim, a new style trim shell and a premium stainless steel sink stopper with cover. It is supplied with built-in air switches in black, chrome and brushed steel and is supported by an 8 year parts and service guarantee.


Features

- Built-in air switch in black, chrome and brushed steel
- 8 year guarantee
- Deluxe polished chrome stopper cover
- New style trim shell
- Evolution Ultra-quiet technology
- Evolution 3-stage grind technology
- Auto-reverse grinding action
- High-torque Dura-Drive™ induction motor
- Stainless steel grind elements and grind chamber
- Overload protection
- Quick Lock® mounting assembly for faster, easier installation

**PRODUCT
SPEC SHEET**

Showroom
collection:
Evolution 250 food
waste disposer

Dimensions (mm)

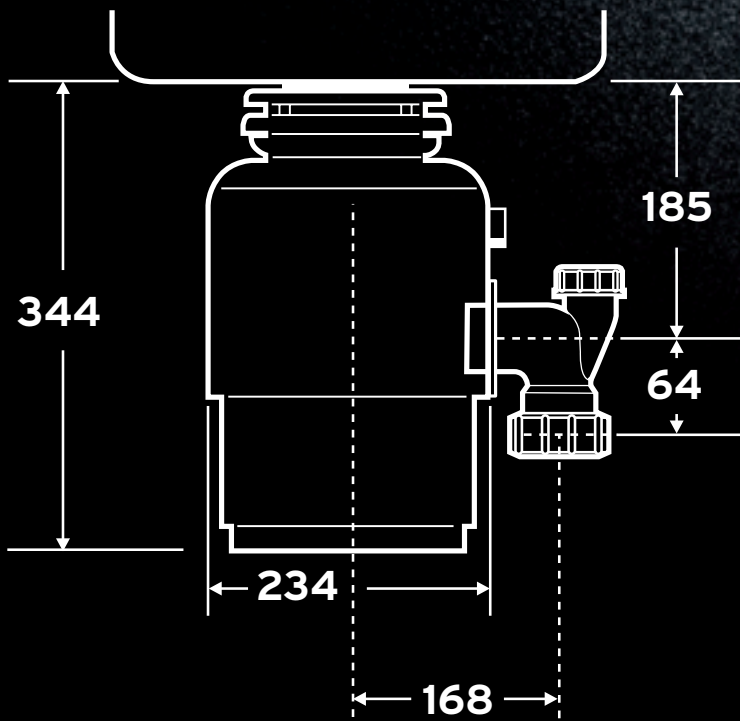

Compatible with Cover control



For those who prefer the on/off switch built right into the disposer cover, InSinkErator offers the cover control accessory. It's just right for efficient batch feed operation. (Not available in all markets.)

Specifications (mm)

Type of feed	Continuous
On/Off Control	Wall switch or built-in air switch
Motor	Single phase
Reversing	Auto-reverse grind system
Time Rating	Intermittent
Lubrication	Permanently lubricated upper & lower bearings
Shipping Weight (Approx.)	11.6kg
Unit Finish	Stainless steel light Gray TEN-1706
Overall Height	344mm
Grind Technology	3-stage grind technology Power booster circuit with microprocessor technology included
Sound Technology	Anti-vibration mounting and tailpipe Quiet sink baffle multi layer sound insulation Stainless steel strainer basket & plug
Grind Chamber Capacity	1180ml
Motor Protection	Manual reset overload
Average Water Usage	Approximately 4.0L per person per day
Average Electrical Usage	3-4KWH per annum
Drain Connection	1-1/2" (3.81cm) anti vibration (hose clamp)
Dishwasher Drain Connection	Yes

Volts/Hz	HP	RPM	Average Load
120V, 60Hz	1.0	1725	10.2 A
220-240V, 50Hz	.75	1425	380 W
220-240V, 60Hz	.75	1725	370 W



InSinkErator
Suite 10, Building 6
Hatters Lane
Croxley Green Business Park
Watford, Herts WD18 8YH
United Kingdom
Sales tel: (0) 1 923 297 880
Service tel: (0) 800 389 3715
www.insinkerator.co.uk

InSinkErator
Emerson Electric Co.
4700 21st Street
Racine, WI 53406-5093 USA
Sales/Service tel: 262-554-5432
www.insinkerator.com/worldmap.html

